



Specification Sheet

Johnston CN201 Sweeper

Johnston CN201 Sweeper Specification Sheet

SERIES: CN201 EURO 5 / STAGE 3A ENGINE
DATE: FEBRUARY 2015
SHEET: 1 OF 2



Data and Performance Information:

Engine Option Euro 5	
Model	VM R754 EU5 05D/9 common rail direct injectionturbocharged and intercooled diesel engine
Cubic capacity	2.970 litres
No. of cylinders	4
Gross rated power	62 kW (83 bhp) @ 2300 rev./min.
Maximum torque	270 Nm (199 lb.ft.) @ 1400 rev./min.
Legislation compliance	Meets Euro 5/stage 3b emissions legislation Directive 97/68/EC as last amended by Directive 2004/26 EC

Performance	
Tare Weight	2700 kg (dependant on option)
GVM	3500 kg. 4000 kg. *4500 kg. (*Where local homologation allows)
Payload	800 kg. 1300 kg. 1800 kg. (dependant on options)
Maximum speed	Up to 40 km/h
Sweeping speed	0 to 16 km/h
Sweep rate/output	36,800 m ² /hr (theoretical max)
Gradeability forwards	Up to 30%
Sweeping operational rpm	1000 - 1480 rpm
Transit operational rpm	Up to 2000 rpm

Sweeping Equipment	
Brush diameter	850 mm
Brush speed	Variable up to 125 rev./min.
Nozzle width	815 mm
Hopper discharge height	1.525 m

Capacities	
Hopper voided volume	1.8 m ³ , 4003 stainless steel hopper
Payload capacity	1.5 m ³
Fuel tank	52 litres
Clean water tank	152 litres
Recirculation system	250 litres
Total water systems	402 litres

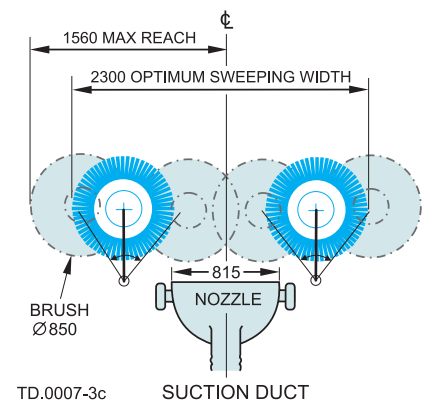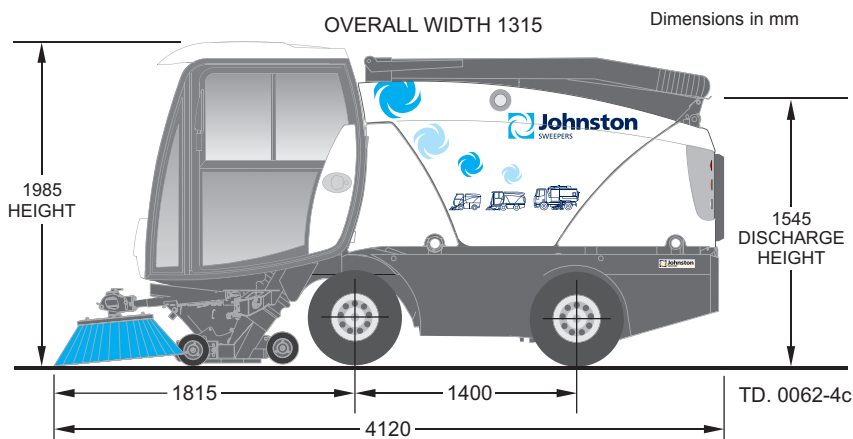

Johnston CN201 Sweeper Specification Sheet

SERIES: CN201 EURO 5
DATE: FEBRUARY 2015
SHEET: 2 OF 2

Technical Specifications:

Transmission:

Full hydrostatic transmission with closed loop circuit and variable angle swash plate piston pump. Maximum transit speed up to 40 km/h. Sweeping speeds up to 16 km/h.

Engine Control:

Innovative Johnston microprocessor transmission control system providing full automotive drive in transit mode, forward / reverse selection with slower "tortoise" speed feature for sweeping applications with anti-stall software.

Electrics:

12 volt system with 105 amp alternator.

Glide Suspension Standard:

Four wheel coil spring suspension with gas over oil dampers and a front mounted anti-roll bar.

Steering:

Full hydraulic power steering.
Standard Turning Circle
2WS 4350mm kerb to kerb.
5150mm wall to wall.

Tyre Size:

Front: 6.50 R10 Radial tyres
Rear: 225/75 R10 Radial tyres
Wide profile tyres give low ground pressure.

Brakes:

Front: Servo assisted hydraulic drum brakes with dual circuits between front and rear for added braking security.
Rear: Hydraulic drum brakes with integral parking brake.

Noise:

In cab: Noise between 67-75 dB(A), depending on operating speed.
External: Under sweeping conditions 74 - 78 dB(A).
Maximum L_{WA} of 103 dB(A) measured in accordance with Directive 2000/14/EC.

Vibration:

The vector sum weighted root means square acceleration values ($a_{h,w}$) during recommended sweeping/washing activities do not exceed 2.5 m/s² for hand-arm vibration and 0.5 m/s² for whole body vibration.

Impeller:

High pressure centrifugal fan unit mounted to hopper roof provides powerful suction means for the pickup nozzle and duct conveying system. Driven by hydraulic motor with integral heavy duty support bearings. Dynamically balanced multivane low noise fan impeller with wear resistant blades.

Cab:

Heater: Recirculating and fresh air blend heater with adjustable vents.
Visibility: Fully glazed with tinted safety glass. Electrically heated "Quick-clear" windscreen. Single pantograph twin speed plus intermittent windscreen wiper and screen washer.
Seating: Fully adjustable air suspension cloth covered driver's seat with adjustable back support. Rigidly mounted passenger seat.
Controls: Ergonomically designed for driver comfort.
Switches located according to function.
Overhead console incorporating lighting switches, stereo radio/mp3 player 7 inch full-colour JVM screen.
A rear console containing ignition switch, tipping controls, suction fan and water switches.
Arm rest containing all sweeping related controls for brushes, engine speed, brush balance, cruise control etc., is ergonomically positioned near to the driver.

Standard machine features:

JVM Display System (7 inch full-colour): Alerts the driver in the event of a system problem, also records various data which may be downloaded via USB, 'Data Capture' feature as standard.
Beacon: Standard rotating with knock down feature.
Independent brush control.
Stereo Radio MP3 Player c/w USB interface with 45 watt dual cone speakers.
Reverse Warning: Audible warning device with night silent override.
Supawash: High pressure washing hand lance and pump (9 litres @ 68 bar) c/w reel and 10m hose.
Self Steering Wheeled Nozzle: With non marking replaceable rubber tyres.
Leaf flap on nozzle for ingestion of leaves.
Air conditioning.
Options:
Autolube grease system.
CCTV reverse camera system.
Hydrant hose, standpipe & key.
Radio/CD upgrade.
Rear arrow board light bar.
Rear towing attachment.
Spare wheel & jack.
Wanderhose: Roof mounted with 3.7 metre reach.

Bucher Municipal Head Office

65-73 Nantilla Rd,
Clayton North, Vic.
3168 Australia
Tel: +61 (0)3 9271 6400
Fax: +61 (0)3 9271 6480
refuse@buchermunicipal.com.au

Bucher Municipal VIC Office

Unit 6, 80 Fairbank Road,
Clayton South, Vic.
3169 Australia
Tel: +61 (0)3 8558 3600
Fax: +61 (0)3 8558 3640
refuse@buchermunicipal.com.au

Bucher Municipal NSW Office

Unit 2, 9 Enterprise Place,
Wetherill Park, NSW
2164 Australia
Tel: +61 (0)2 8787 9600
Fax: +61 (0)2 8787 9697
refuse@buchermunicipal.com.au

Bucher Municipal QLD Office

50 Buchanan Road,
Banyo, Qld
4014 Australia
Tel: +61 (0)7 3363 6400
Fax: +61 (0)7 3363 6499
refuse@buchermunicipal.com.au

Bucher Municipal SA Office

4 Newcastle Crescent,
Cavan, SA
5094 Australia
Tel: +61 (0)8 8168 2222
Fax: +61 (0)8 8168 2240
refuse@buchermunicipal.com.au

Bucher Municipal WA Office

76 Grey Street,
Bassendean, WA
6054 Australia
Tel: +61 (0)8 9370 7900
Fax: +61 (0)8 9370 7998
refuse@buchermunicipal.com.au

www.buchermunicipal.com

The current Bucher international locations.

