


Technical sheet

M-X 50-4

Masted Forklift Trucks




	Technical characteristics	Metric	Imperial
1.1	Manufacturer	Manitou	Manitou
1.2	Model	M-X 50-4	M-X 50-4
1.3	Type of traction	Diesel	Diesel
1.4	Type of operation	Seated	Seated
1.5	Q - Rated capacity	5000 kg	11000 lbs
1.6	c - Center of gravity of load	500 mm	2 in
1.9	y - Wheelbase	2120 mm	6 ft 12 in
	Weight		
2.1	Weight of truck in working order	7660 kg	16852 lbs
	Wheels		
3.1	Tyre equipment: bandage (V), PPS (SE), inflatable tyre (L)	L	L
3.2	Size of front wheels	18-22,5MPT06 16PRTL	-
3.5	Number of front wheels (x	2x / 2	2x / 2
3.6	b10 - Front track	1.62 mm	5 in
	Dimensions		
4.1	α / β - Front/Rear mast angle	15 ° / 15 °	15 ° / 15 °
4.2	h1 - Height (mast lowered)	2500 mm	8 ft 2 in
4.4	h3 - Lift height (Duplex mast)	3700 mm	12 ft 2 in
4.20	l2 - Length to fork heel	3750 mm	12 ft 5 in
4.21	b1 - Overall width - Singe/twin wheels	2100 mm / -	6 ft 1 in / -
4.22	e / s / l - Fork dimensions	1200 x 150 x 60	3.11 X 0.6 X 0.2
4.35	Wa - Turning radius	4160 mm	13 ft 10 in
	Performances		
5.1	Speed of travel laden / unladen	24 km/h / -	14.90 mph / -
5.2	Lifting speed laden / unladen	- / 0.40 m/s	- / 1.40 ft/s
5.3	Lowering speed laden / unladen	- / 0.40 m/s	- / 1.40 ft/s
5.5	Nominal pulling force laden / unladen	10360 daN / -	23290 lbf / -
	Engine		
7.1	Engine manufacturer / Type	Perkins / 3A	Perkins / 3A
7.2	Useful power	70 kW	70 kW
7.4	Number of pistons / Capacity	4 / 4400 cm ³	4 /
	Miscellaneous		
8.2	Working hydraulic pressure for attachments	210 bar	3047 psi
8.3	Oil flow rate for attachments	85 l/min	22 gpm
8.4	Measured/guaranteed mean noise level at the ear of the operator	76 dB(A)	76 dB(A)

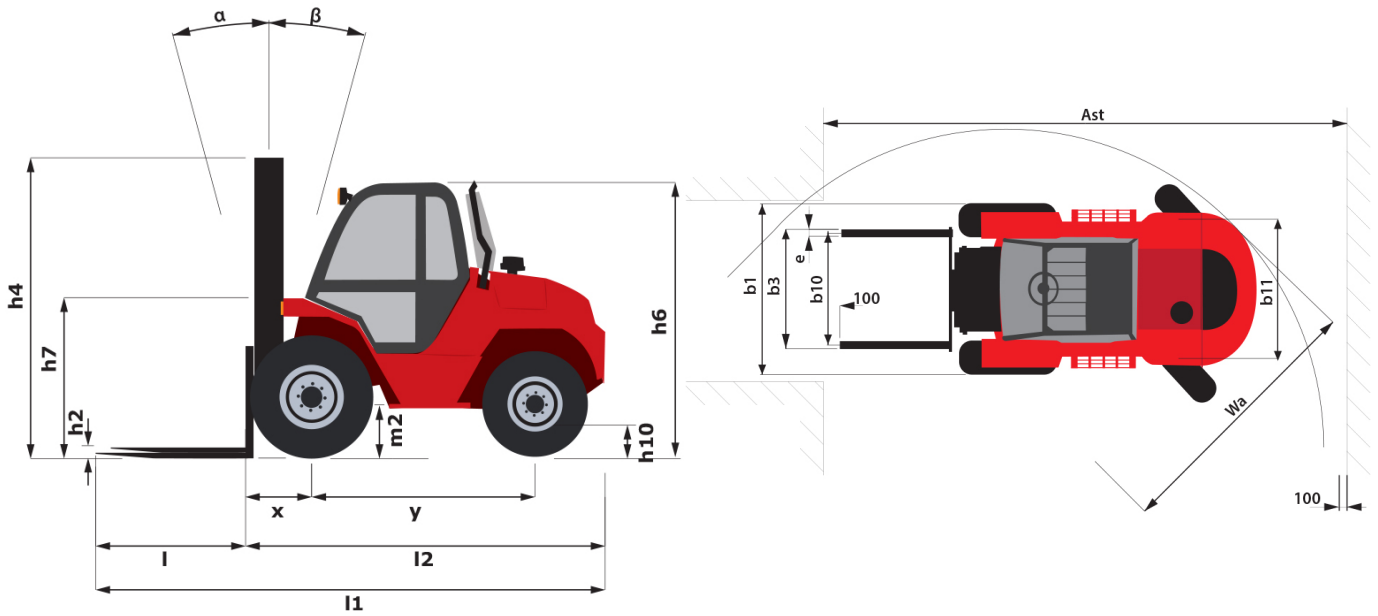

Characteristics of masts and residual capacities

Duplex Total Visibility		FVD30	DVT 33	FVD35	FVD37	FVD40	FVD45	FVD50
Lift height	mm	3060	3360	3560	3760	4060	4560	5060
Height (mast lowered)	mm	2560	2710	2810	2910	3060	3305	3560
Free lift	mm	0	0	0	0	0	0	0
Height of extended mast	mm	4115	4415	4615	4815	5115	5615	6115
Residual Capacity without attachment (Industrial load chart)	kg	5000	5000	5000	5000	5000	4500	4000
Residual Capacity with integrated side shift (Industrial load chart)	kg	4700	4700	4700	4700	4700	4050	3600

[illegible]

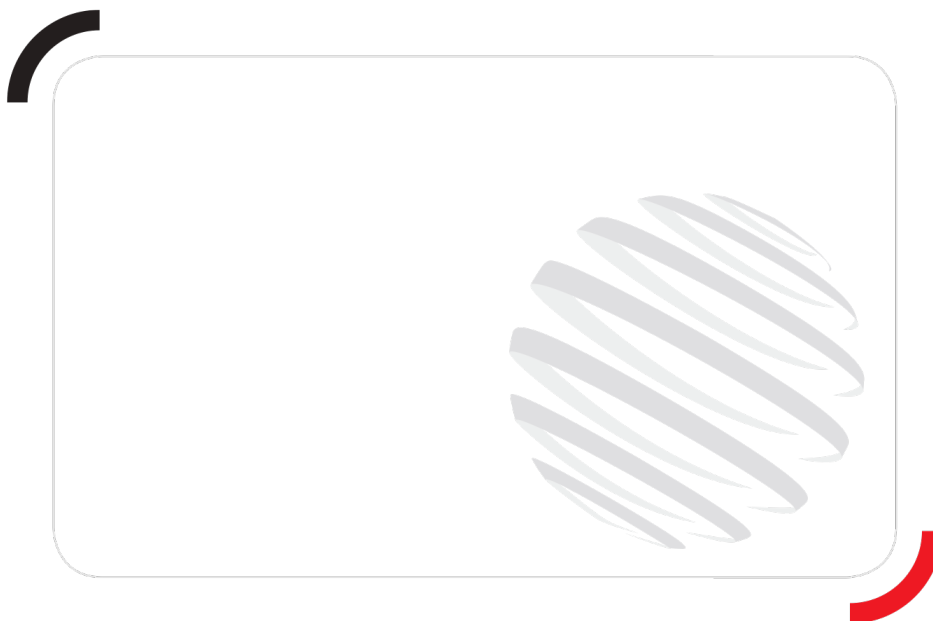

Siège Social
430 rue de l'Aubinière - 44150 Ancenis Cedex - France
Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97
www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,547,824 euros - 857 802 508 RCS Nantes